


1 PANEL SHAKER MOLDED DOORS



SMOOTH 7'0" SQUARE



HOLLOW CORE DOOR

- 1-3/8" and 1-3/4" hollow core
- Fiberwood or Fingerjoint stiles and rails

SOLID CORE DOOR

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- Fingerjoint stiles and rails

Sizes Available

| Dimensions | Availability | Panels |
|--------------|--------------|--------|
| 1'0" x 7'0" | X | 1 |
| 1'2" x 7'0" | X | 1 |
| 1'3" x 7'0" | X | 1 |
| 1'4" x 7'0" | X | 1 |
| 1'6" x 7'0" | X | 1 |
| 1'8" x 7'0" | X | 1 |
| 1'10" x 7'0" | √ | 1 |
| 2'0" x 7'0" | √ | 1 |
| 2'2" x 7'0" | X | 1 |
| 2'4" x 7'0" | √ | 1 |
| 2'6" x 7'0" | √ | 1 |
| 2'8" x 7'0" | √ | 1 |
| 2'10" x 7'0" | X | 1 |
| 3'0" x 7'0" | √ | 1 |


NOTE: Items designated with an X are cut from larger size skins.
Items designated with a √ are available for order. NA for Not Available.

1 PANEL SHAKER MOLDED DOORS

SMOOTH 7'0" SQUARE



Standard Dimensions

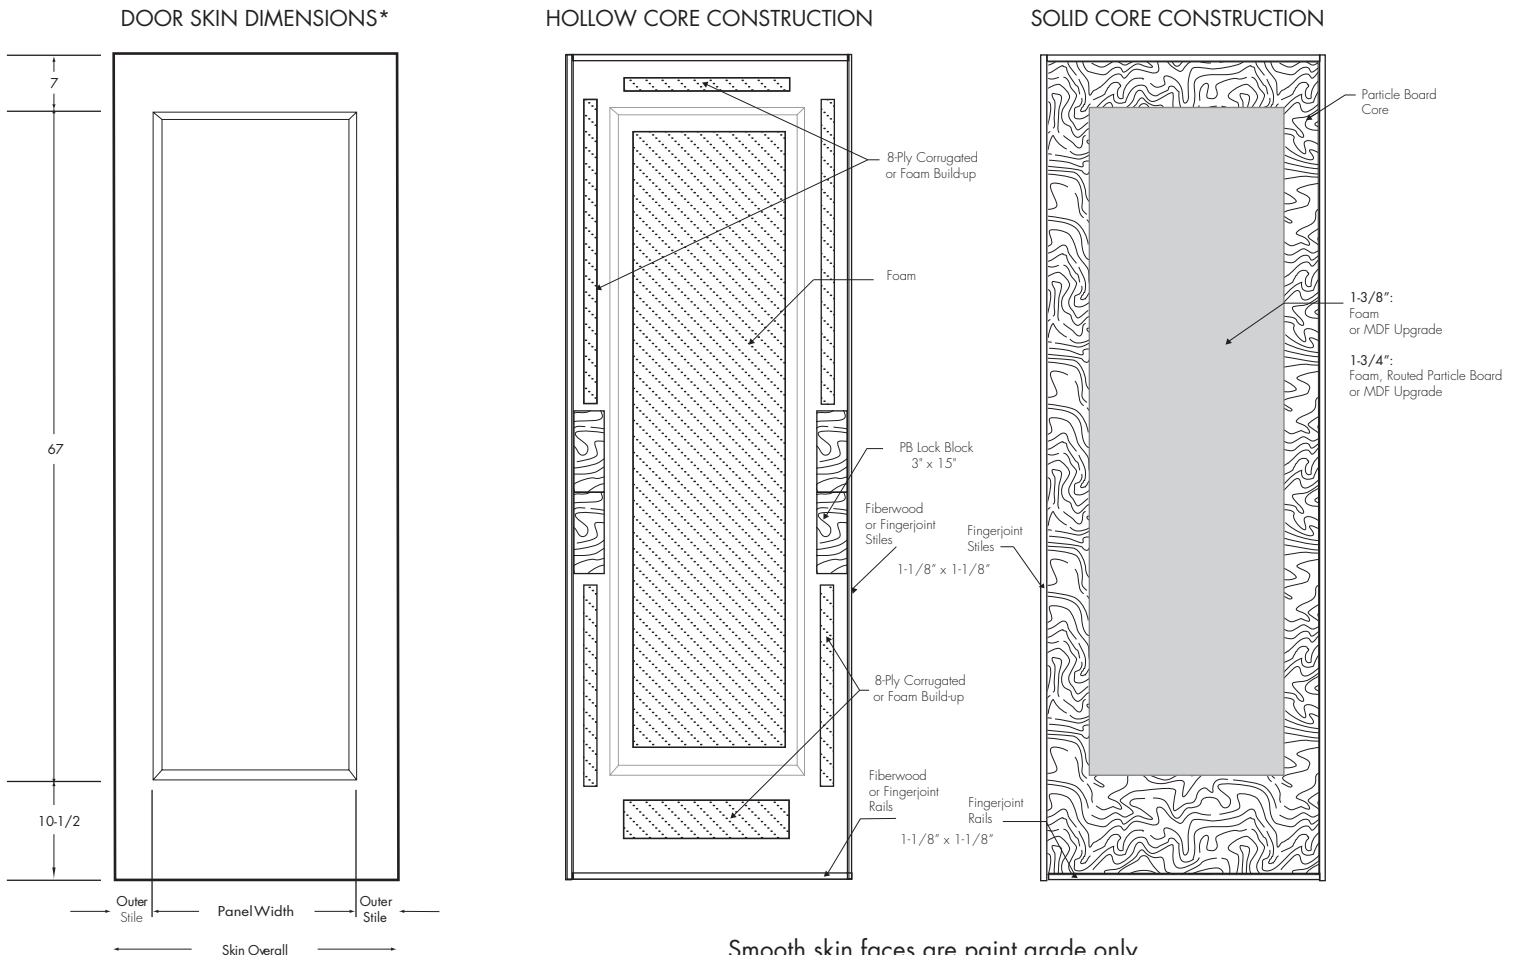

Smooth skin faces are paint grade only.
All measurements are approximate.
All door facings are nominal 1/8" thick.
Type 2 glue bond standard.

*Measurements are approximate and before any required trim or adjustments for customer specifications

| Skin Size | Skin Overall | Panel Width | Center Stile | Outer Stile |
|--------------|--------------|-------------|--------------|-------------|
| 1'0" x 7'0" | 1'0-3/8" | 5-3/8" | NA | 3-1/2" |
| 1'2" x 7'0" | 1'2-3/8" | 5-3/8" | NA | 4-1/2" |
| 1'3" x 7'0" | 1'3-3/8" | 5-3/8" | NA | 5" |
| 1'4" x 7'0" | 1'4-3/8" | 7-7/8" | NA | 4-1/4" |
| 1'6" x 7'0" | 1'6-3/8" | 7-7/8" | NA | 5-1/4" |
| 1'8" x 7'0" | 1'8-3/8" | 11-1/2" | NA | 4-7/16" |
| 1'10" x 7'0" | 1'10-3/8" | 11-1/2" | NA | 5-7/16" |

| Skin Size | Skin Overall | Panel Width | Center Stile | Outer Stile |
|--------------|--------------|-------------|--------------|-------------|
| 2'0" x 7'0" | 2'0-3/8" | 1'3-1/2" | NA | 4-7/16" |
| 2'2" x 7'0" | 2'2-3/8" | 1'3-1/2" | NA | 5-7/16" |
| 2'4" x 7'0" | 2'4-3/8" | 1'6-1/2" | NA | 4-15/16" |
| 2'6" x 7'0" | 2'6-3/8" | 1'8-1/2" | NA | 4-15/16" |
| 2'8" x 7'0" | 2'8-3/8" | 1'10-1/2" | NA | 4-15/16" |
| 2'10" x 7'0" | 2'10-3/8" | 1'10-1/2" | NA | 5-15/16" |
| 3'0" x 7'0" | 3'0-3/8" | 2'2-1/2" | NA | 4-15/16" |

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.