


2 PANEL ARCHTOP MOLDED DOORS



TEXTURED 6'8" BEAD AND COVE



Bead and Cove profile

HOLLOW CORE DOOR

- 1-3/8" and 1-3/4" hollow core
- Fingerjoint or Fiberwood stiles
- Wood rails available

SOLID CORE DOOR

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- All wood construction
- Available in particle board core

Sizes Available

| Dimensions | Availability | Panels |
|--------------|--------------|--------|
| 1'0" x 6'8" | X | 2 |
| 1'2" x 6'8" | X | 2 |
| 1'3" x 6'8" | X | 2 |
| 1'4" x 6'8" | √ | 2 |
| 1'6" x 6'8" | √ | 2 |
| 1'8" x 6'8" | √ | 2 |
| 2'0" x 6'8" | √ | 2 |
| 2'2" x 6'8" | X | 2 |
| 2'4" x 6'8" | √ | 2 |
| 2'6" x 6'8" | √ | 2 |
| 2'8" x 6'8" | √ | 2 |
| 2'10" x 6'8" | √ | 2 |
| 3'0" x 6'8" | √ | 2 |

NOTE: Items designated with an X are cut from larger size skins.
Items designated with a √ are available for order. NA for Not Available.


2 PANEL ARCHTOP MOLDED DOORS

TEXTURED 6'8" B/C




Standard Dimensions


DOOR SKIN DIMENSIONS*

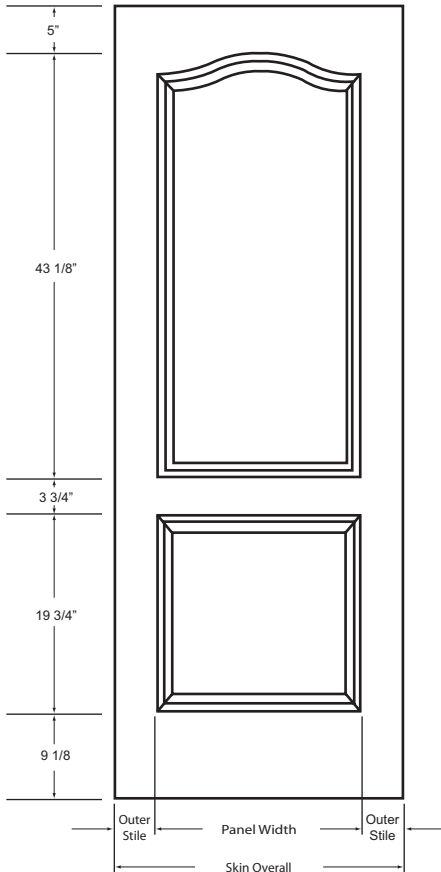

HOLLOW CORE CONSTRUCTION

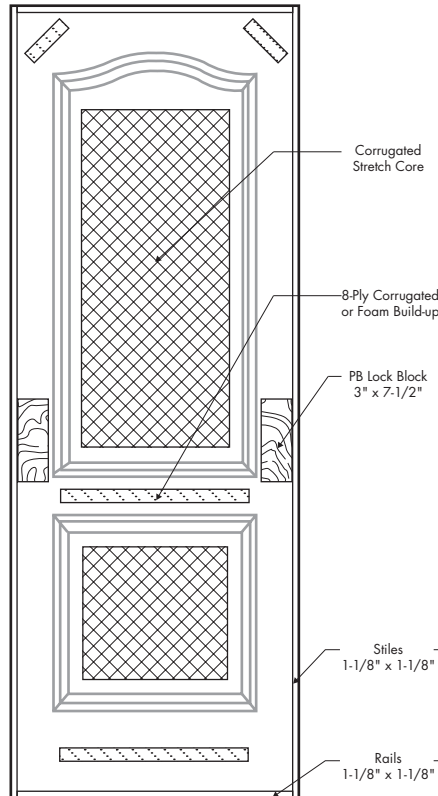

SOLID CORE CONSTRUCTION

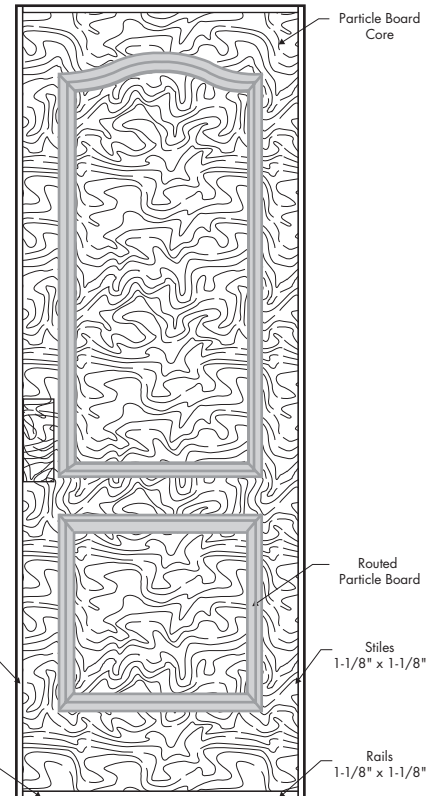

Smooth skin faces are paint grade only.
All measurements are approximate.
All door facings are nominal 1/8" thick.
Type 2 glue bond standard.

*Measurements are approximate and before any required trim or adjustments for customer specifications

| Skin Size | Skin Overall | Panel Width | Center Stile | Outer Stile | Skin Size | Skin Overall | Panel Width | Center Stile | Outer Stile |
|-------------|--------------|-------------|--------------|-------------|--------------|--------------|-------------|--------------|-------------|
| 1'0" x 6'8" | 1'0-3/8" | 6-11/16" | NA | 2-27/32" | 2'2" x 6'8" | 2'2-3/8" | 1'2-15/16" | NA | 5-23/32" |
| 1'2" x 6'8" | 1'2-3/8" | 7-1/2" | NA | 3-7/16" | 2'4" x 6'8" | 2'4-3/8" | 1'6-1/8" | NA | 5-1/8" |
| 1'3" x 6'8" | 1'3-3/8" | 7-1/2" | NA | 3-15/16" | 2'6" x 6'8" | 2'6-3/8" | 1'7-11/16" | NA | 5-11/32" |
| 1'4" x 6'8" | 1'4-3/8" | 7-1/2" | NA | 4-7/16" | 2'8" x 6'8" | 2'8-3/8" | 1'10-13/16" | NA | 4-25/32" |
| 1'6" x 6'8" | 1'6-3/8" | 9-1/2" | NA | 4-7/16" | 2'10" x 6'8" | 2'10-3/8" | 1'10-13/16" | NA | 5-25/32" |
| 1'8" x 6'8" | 1'8-3/8" | 9-1/2" | NA | 5-7/16" | 3'0" x 6'8" | 3'0-3/8" | 2'1" | NA | 5-11/16" |
| 2'0" x 6'8" | 2'0-3/8" | 1'2-15/16" | NA | 4-23/32" | | | | | |

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.