


# 5 PANEL MOLDED DOORS



SMOOTH

8'0" BEAD AND COVE



Bead and Cove profile

## HOLLOW CORE DOOR

- 1-3/8" and 1-3/4" hollow core
- Fingerjoint or Fiberwood stiles
- Wood rails available

## SOLID CORE DOOR

- 1-3/8" and 1-3/4" solid core
- Gives solid feel with sound reduction
- All wood construction
- Available in particle board core

## Sizes Available

Dimensions	Availability	Panels
1'0" x 8'0"	NA	NA
1'2" x 8'0"	NA	NA
1'3" x 8'0"	NA	NA
1'4" x 8'0"	NA	NA
1'6" x 8'0"	X	6
1'8" x 8'0"	√	6
2'0" x 8'0"	√	6
2'2" x 8'0"	√	6
2'4" x 8'0"	√	6
2'6" x 8'0"	√	6
2'8" x 8'0"	√	6
2'10" x 8'0"	√	6
3'0" x 8'0"	√	6


NOTE: Items designated with an X are cut from larger size skins.  
Items designated with a √ are available for order. NA for Not Available.

# 5 PANEL MOLDED DOORS

SMOOTH 8'0" B/C



## Standard Dimensions

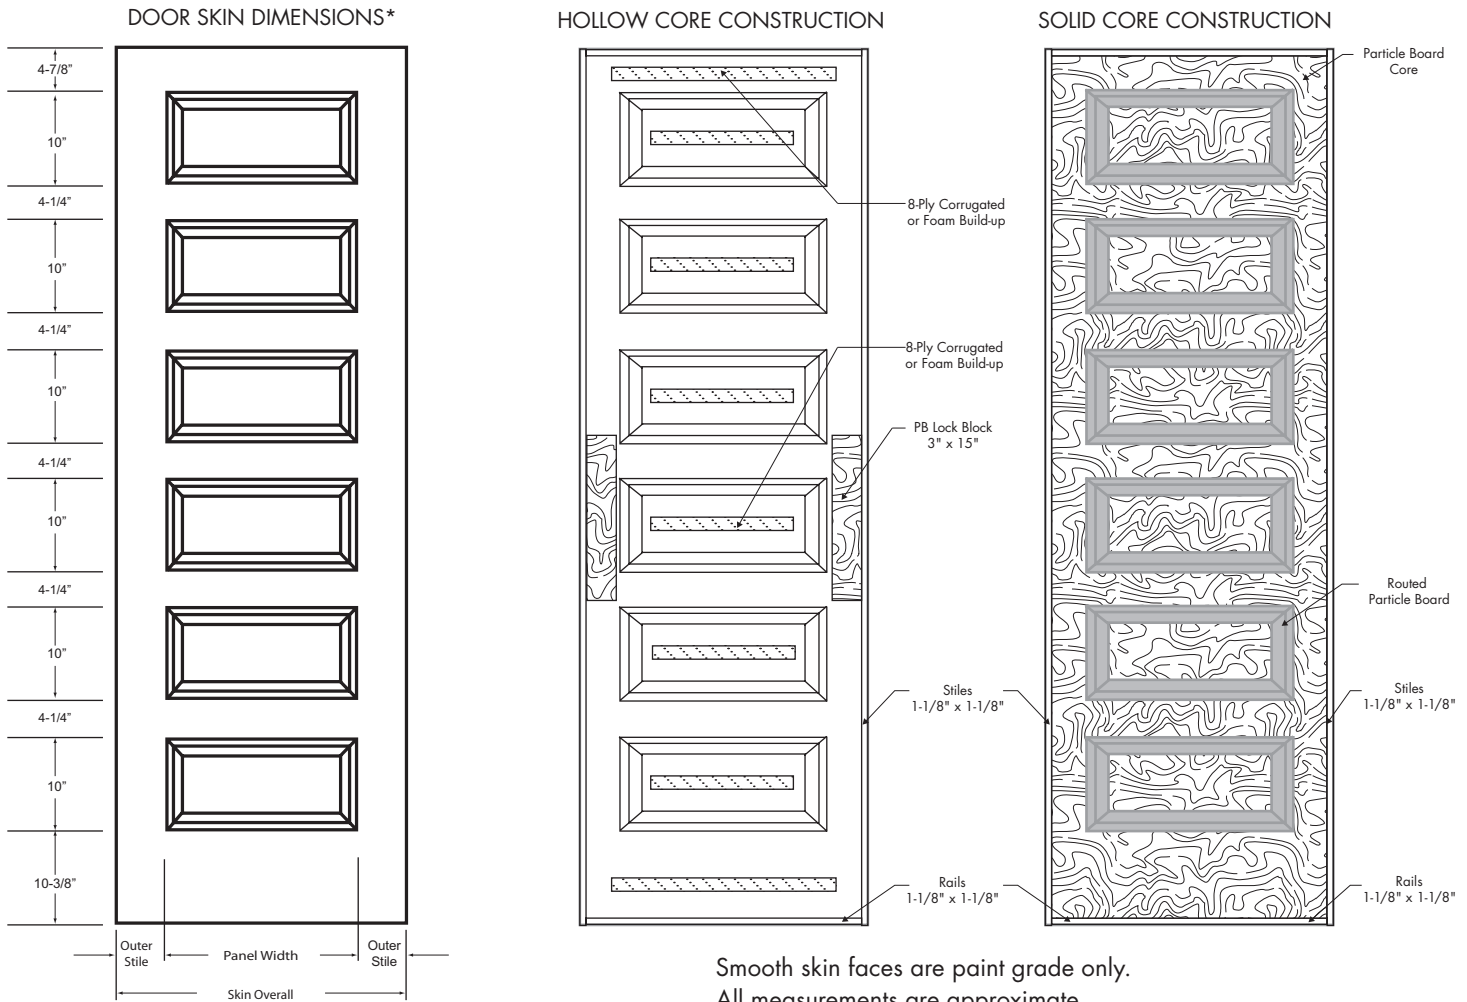

\*Measurements are approximate and before any required trim or adjustments for customer specifications

Smooth skin faces are paint grade only.  
All measurements are approximate.  
All door facings are nominal 1/8" thick.  
Type 2 glue bond standard.

Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile	Skin Size	Skin Overall	Panel Width	Center Stile	Outer Stile
1'0" x 8'0"	NA	NA	NA	NA	2'2" x 8'0"	2'2-3/8"	1'2-1/2"	NA	5-15/16"
1'2" x 8'0"	NA	NA	NA	NA	2'4" x 8'0"	2'4-3/8"	1'6-1/2"	NA	4-15/16"
1'3" x 8'0"	NA	NA	NA	NA	2'6" x 8'0"	2'6-3/8"	1'8-1/2"	NA	4-15/16"
1'4" x 8'0"	NA	NA	NA	NA	2'8" x 8'0"	2'8-3/8"	1'10-1/2"	NA	4-15/16"
1'6" x 8'0"	1'6-3/8"	8-1/2"	NA	4-15/16"	2'10" x 8'0"	2'10-3/8"	1'10-1/2"	NA	5-15/16"
1'8" x 8'0"	1'8-3/8"	8-1/2"	NA	5-15/16"	3'0" x 8'0"	3'0-3/8"	2'1-3/4"	NA	5-5/16"
2'0" x 8'0"	2'0-3/8"	1'2-1/2"	NA	4-15/16"					

Note: A standard 2-1/8" bore diameter will require a minimum stile measurement of 3-11/16" to allow for a 2-3/8" backset. A standard 2-1/8" bore diameter will require a minimum stile measurement of 4-1/16" to allow for a 2-3/4" backset.